MISCELLANEOUS ACCESSORIES & SERVICE

SCREW ANCHOR WRENCH ACCESSORIES

For installing torques up to 10,000 ft.-lbs. A complete wrench consists of a Kelly Bar Adapter, Locking Dog, and Drive End.

- These installing wrenches are part of a complete system for installing screw anchors with power digging equipment.
- The wrench transmits the torque from the Kelly bar of the digger to the hub of the Power Installed Screw Anchor so that the anchor rod need be only large enough in diameter to support the guy load.
- Extension assemblies can be added where soil conditions dictate that anchors be set more than one rod length deep or where digger to ground clearances are limited.

KELLY BAR ADAPTER



Description
2 1/2" Square
2 1/4" Square
2" Hex
2 5/8" Hex
2 1/2" Hex
Features 51/4" bolt circle and includes six 1/2" bolts, nuts, washers.

LOCKING DOG ASSEMBLY




Description

Complete Locking Dog Assembly

Locking Dog Replacement Kit Includes all parts less housing

Features six 1/2" holes on a 5 1/4" bolt circle. Includes six 1/2" grade 5 bolts, nuts, lock washers.

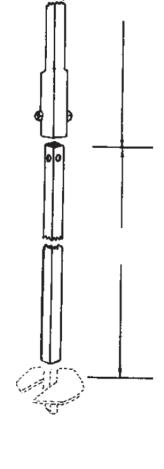



www.utilityequipmentparts.com

MISCELLANEOUS ACCESSORIES & SERVICE

DRIVE END ASSEMBLY



Description		
8' Drive End Assembly	For 1 1/2" Core Anchors. Installs SS-5, SS-150, and Round Rod Anchors	
3 1/2' Drive End Assembly	For 1 3/8"Core Anchors. Installs Standard-Strength, Mid-Strength, and Tough One Anchors (8,000 & 10,000 ft-lb) For 1 1/2" Core Anchors. Installs PISA 6 & 7 and Tough One (8,000 ft-lb)	
7' Drive End Assembly	For 1 3/8"Core Anchors. Installs Standard-Strength, Mid-Strength, and Tough One Anchors (8,000 & 10,000 ft-lb) Orange Band For 1 1/2" Core Anchors. Installs PISA 6 & 7 and Tough One (8,000 ft-lb) Yellow Band	

EXTENSION ASSEMBLY



Description
3 1/2' Extension Assembly
7' Extension Assembly




MISCELLANEOUS ACCESSORIES & SERVICE

ADAPTER HUBS





HEX COUPLERS



TELESCOPING EXTENSION BARS

